



陕汽重卡
SHACMAN

德赢天下 服务领先 品质成就未来
Renown with Virtues, Leading by Service, Success with Quality

X6000

保养说明 Maintenance Instructions



1、潍柴WP13发动机—6万公里/1年

1. Weichai WP13 engine - 60,000 km/1 year

需要进行首次保养--4000公里/3个月


First maintenance required - 4000 km/3 months

油品及牌号—潍柴专用长效全合成柴机油CI/10W-40

Oil product and grade - Weichai special long-acting fully synthetic diesel engine oil CI/10W-40

油底壳容量—27L/以油尺测量为准


Oil pan capacity - 27 L/subject to dipstick measurement

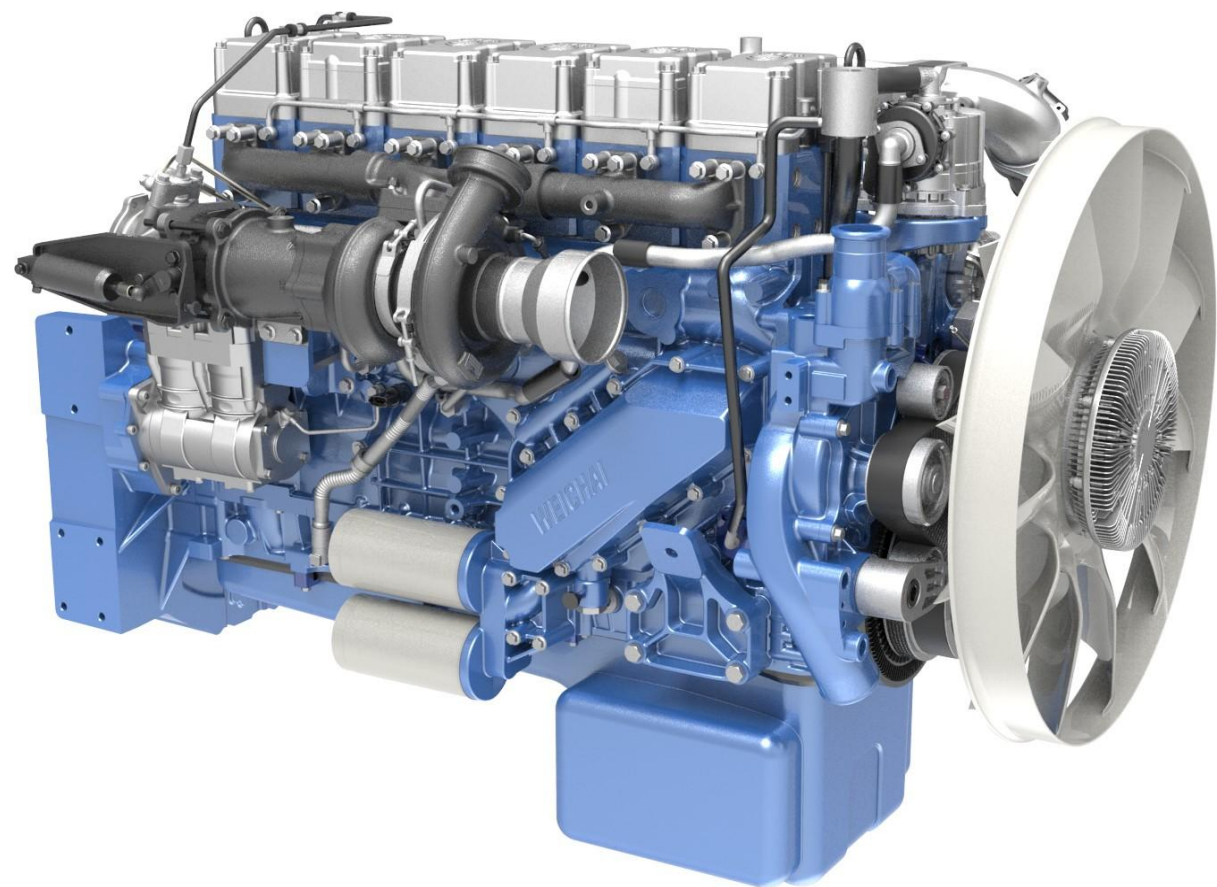

- 1、潍柴WP13发动机—6万公里/1年
1. Weichai WP13 engine - 60,000 km/1 year

油品及牌号—没有被认证过的
Oil product and grade - not certified

Truck motor oil that meets CI/ 10W40, but you should check color and viscosity of oil after every 10,000 km of run. Moreover, these results are used to establish the oil change interval.

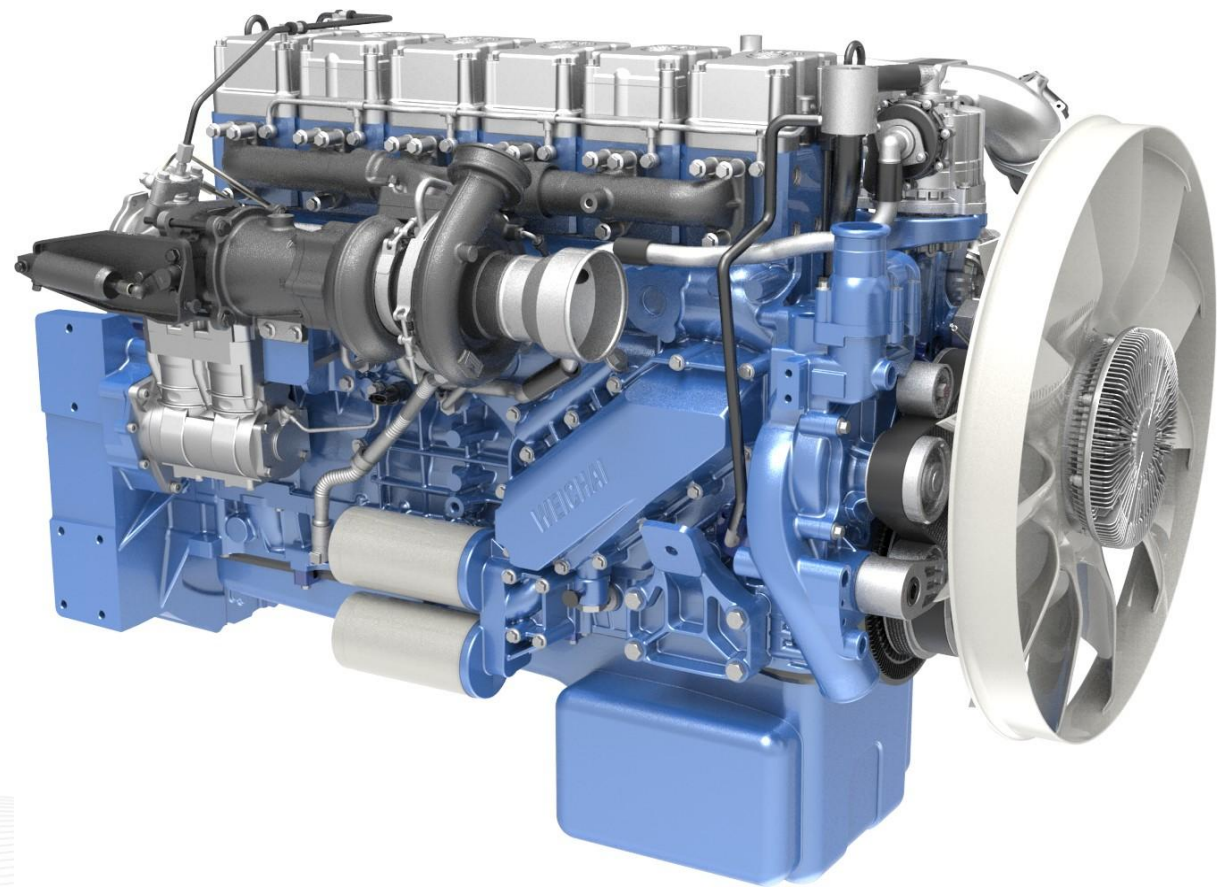


- 2、ZF Traxon AMT变速箱—36万公里/3年
2. ZF Traxon AMT transmission - 360,000 km/3 years

无需首保
No need for first maintenance

油品及牌号—ZF 02E认证专用长效全合成润滑油
Oil product and grade - ZF 02E certified special long-acting fully synthetic lubricant


油底壳容量—变速箱13.5L+缓速器10L+取力器1L 合计24.5L
Oil pan capacity - transmission 13.5 L + retarder 10 L + PTO 1 L Total 24.5 L

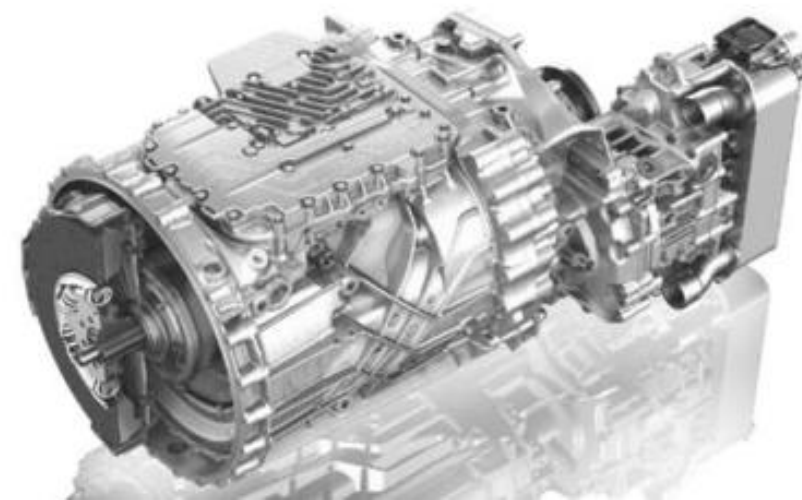

- 2、ZF Traxon AMT变速箱—24万公里/2年
2. ZF Traxon AMT transmission - 240,000 km/2 years

无需首保
No need for first maintenance


油品及牌号—ZF 02L认证专用长效全合成润滑油
Oil product and grade - ZF 02L certified special long-acting fully synthetic lubricant

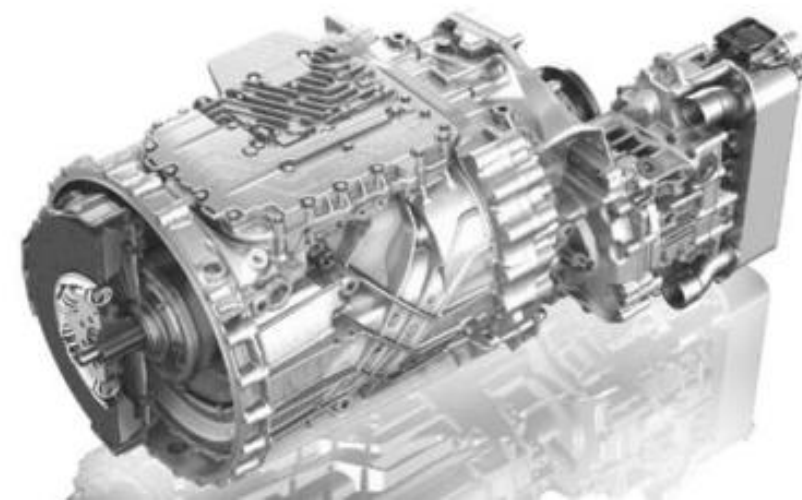

2、ZF Traxon AMT变速箱
2. ZF Traxon AMT transmission

油品及牌号—没有被认证过的
Oil product and grade - not certified

符合API GL-4（禁止使用GL-5） 75W-80的卡车润滑油，每间隔50 000公里检查润滑油的年度和颜色，判断润滑油的更换期限。
Truck lubricant conforming to API GL-4 (Use of GL-5 is prohibited) 75W-80, check the year and color of the lubricant every 50,000 km to judge the replacement period of the lubricant.

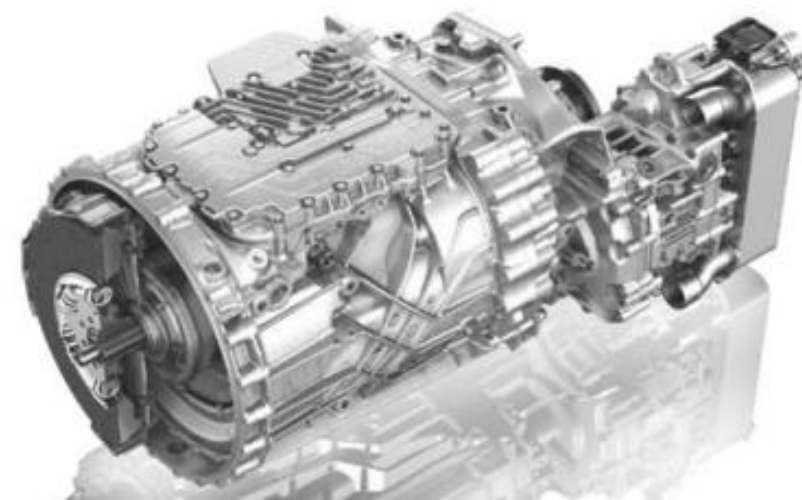

- 3、HD 440 驱动桥—12万公里/1年
3. HD 440 drive axle - 120,000 km/1 year

无需首保
No need for first maintenance

油品及牌号—HD 认证专用长效全合成润滑油
Oil product and grade - HD certified special long-acting fully synthetic lubricant

油底壳容量—中桥15L/后桥13.5L 以油量观察孔为准
Oil pan capacity - middle axle 15 L/rear axle 13.5 L, subject to fuel volume observation hole



3、HD 440 驱动桥
3. HD 440 drive axle

油品及牌号—没有被认证过的
Oil product and grade - not certified

符合API GL-5 75W-80的卡车润滑油，在使用60 000公里后，每间隔15 000公里检查润滑油的年度和颜色，判断润滑油的更换期限。

For truck lubricant that comply with API GL-5 75W-80, after 60,000 km of use, check the year and color of the lubricant every 15,000 km to judge the replacement period of the lubricant.

