

7、Steering voice prompter


◆Function Principle Introduction

Steering voice is used for vehicle turning and reversing alarm sound, prompting pedestrians to pay attention to the function of the following table：

序号	名称	描述
1	Left and right turn alarm	①When the left (right) turn signal switch is activated, the left (right) steering CAN signal is valid and the voice prompter sounds the alarm "left (right) turn, please pay attention to safety". ② by CAN signal ABS / EBS left (right) wheel speed value difference for left (right) steering, steering voice prompter reported "left (right) turn, please pay attention to safety" alarm sound
2	Reverse Alarm	When the CAN signal in reverse gear is valid, the voice prompter reports "reverse, please pay attention".
3	Mode Switching	Small light (light switch I gear) CAN signal is effective, open the night mode, voice prompt sound pressure level is reduced
4	Alarm priority	The voice prompter does not alarm when the hazard emergency switch is turned on; the voice prompter does not alarm when the vehicle speed is greater than 60km/h; reverse alarm > left and right steering alarm

◆Steering Voice Pin Definition：

Serial number	Definition Description	Remarks
1	Battery power supply	+24V
2	Kev Power	Highly effective
3		
4	Power Ground	
5		
6		
7		
8	CAN-H	
9		
10		
11		
12	CAN-L	

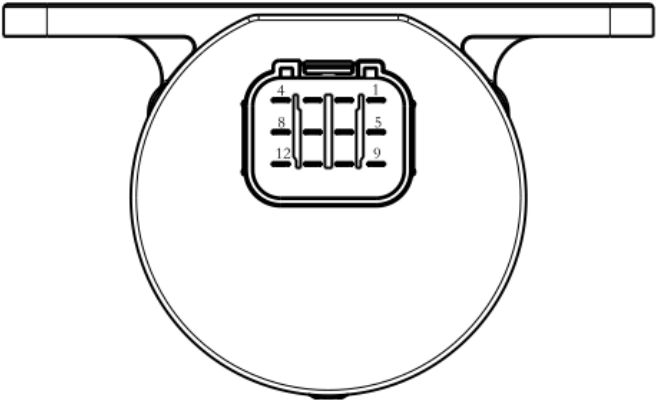

7、Steering voice prompter 转向语音提示器

◆ Fault repair and replacement 故障维修及更换

1) common failures of the steering voice prompter are: steering voice prompter function failure, steering voice prompter straight line alarm, common troubleshooting is shown in the figure on the right.

1)转向语音器常见故障为：转向语音提示器功能失效、转向语音提示器直行报警，常见故障处理见右图；

2) When replacing the steering voice, first unplug the harness plug, then remove the bolts and nuts that hold the voice prompter.

2) 转向语音器更换时先拔掉线束插接器，然后拆卸固定语音提示器的螺栓及螺母。

